

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



10/519915



(43) International Publication Date
15 January 2004 (15.01.2004)


PCT

(10) International Publication Number
WO 2004/005156 A1

- (51) International Patent Classification⁷: B65D 65/46
- (21) International Application Number: PCT/EP2003/007798
- (22) International Filing Date: 26 June 2003 (26.06.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
02254680.8 3 July 2002 (03.07.2002) EP
- (71) Applicant (for AE, AG, AL, AM, AT, AU, AZ, BA, BB, BE, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CY, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, FR, GB, GD, GE, GH, GM, GR, HR, HU, ID, IE, IL, IN, IS, IT, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SZ, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW only): CROWN CORK & SEAL TECHNOLOGIES CORPORATION [US/US]; 11535 S Central Avenue, Alsip, IL 60803-2599 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): RAMSEY, Christopher, Paul [GB/GB]; Braeside, Manor Road, Wantage, Oxfordshire OX12 8DP (GB). GUGLIELMINI, Bernard [FR/FR]; 10 Rue Jean Philippe Rameau, F-21800 Crimolois (FR).
- (74) Agent: SMITH, Debra, Jane, Clare; CarnaudMetalbox Plc, Downsview Road, Wantage, Oxfordshire OX12 9BP (GB).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

[Continued on next page]

(54) Title: WATER-SOLUBLE CONTAINER

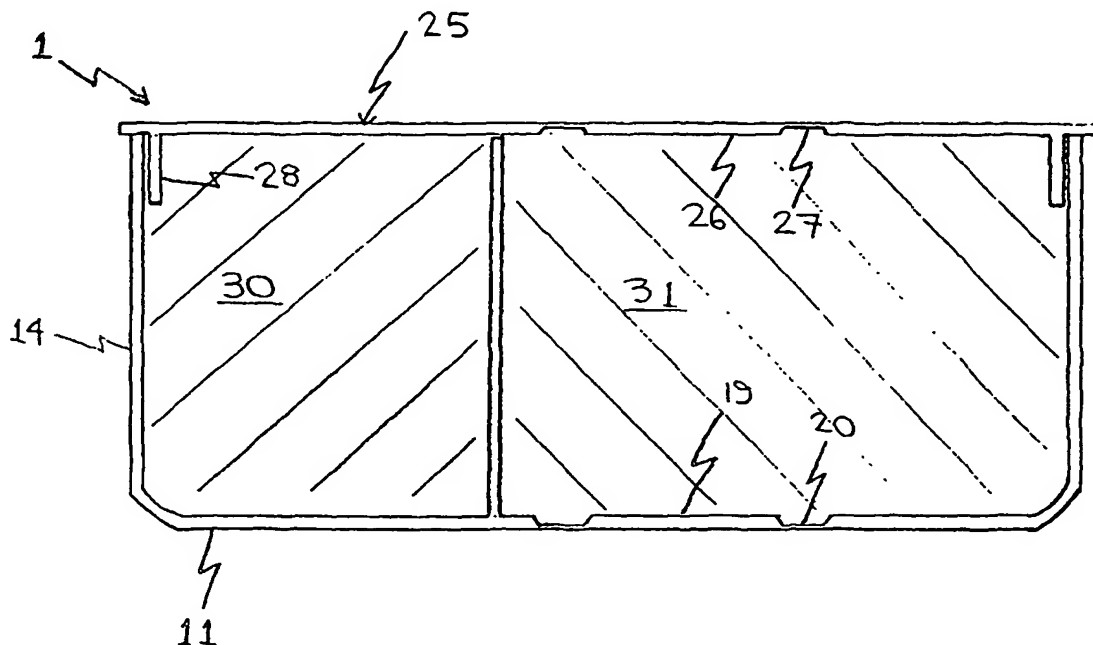

(57) Abstract: A water-soluble container (1) is provided and comprises one or more discrete chambers (30, 31) for containing product. At least part (20, 27) of the wall (11, 25) of the or at least one of the chamber/s is adapted to dissolve before the remainder of the chamber to allow product to escape.



(84) **Designated States (regional):** ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

"WATER-SOLUBLE CONTAINER"

The present invention relates generally to a water-soluble container.

Water-soluble containers as such are well-known and have a variety of uses, such as in clothes washing. For example, CA 1112534 describes a water-soluble container for a detergent composition. The water-soluble material may be, for example, polyvinyl alcohol (PVOH). This document describes a single chamber with a film form wall of constant thickness. Because the chamber wall is of constant thickness, the entire wall must be dissolved before any product can escape. In certain circumstances product may be required quickly, before the time when the entire container has dissolved.

According to the present invention there is provided a water-soluble container comprising one or more discrete chambers for containing product, at least part of the wall of the or at least one of the chamber/s is adapted to dissolve before the remainder of the chamber to allow product to escape. This means that product can escape from a chamber without requiring complete dissolution of the chamber. This can be useful for decreasing the time taken for product to be released. It can also allow for a greater degree of control over when product is released because the area required to be dissolved is reduced.

A container according to the present invention with more than one chamber gives the possibility for a system combining the advantage of not requiring a whole chamber to dissolve before a product is released, together with the possibility of sequential release of products. In its

simplest form a chamber provided with the means for allowing product to escape before complete dissolution could be associated with a chamber not having those means. More complicated systems could involve chambers
5 which allow products to escape after different times before complete dissolution.

The ability of such containers to provide for sequential release of multiple products is extremely useful. For example, clothing washing usually includes a
10 detergent stage and a stage later in the washing cycle in which a softening agent is introduced. Dish-washing sometimes includes a detergent stage and a separate rinsing stage. In many cases it would be preferable and sometimes essential for different stages of washing
15 operations to be kept completely separate.

By providing for sequential release of products the present invention removes the need for manual intervention at different stages of washing cycles and allows the complete washing product to be packaged and
20 supplied together.

The at least part of the wall will most usually be an exterior surface of the container thereby releasing product from the container when it dissolves. However, it is also possible that the at least part of the wall
25 forms part of a chamber which is housed within another chamber which itself includes water, whereby the contents of the chambers are mixed when the at least part of the wall dissolves. This might be useful, for example, if the product in the inner chamber is activated by product
30 in the outer chamber. This allows activation in a

controlled environment before the activated product is released into the exterior of the container and could be useful for products which become unstable once activated.

There are many ways in which the container could be formed in order that product is released from the chamber when the part of the wall dissolves. For example the part of the wall could itself comprise a closure part which dissolves to form an opening in the chamber.

Alternatively, the part of the wall may define a releasable part. When the part of the wall dissolves the releasable part is released, itself as yet undissolved, to form an opening in the chamber. For example, the releasable part may be a panel and the at least part of the wall at least partly surrounds the panel so that it is released, either completely or partially, when the part of the wall dissolves. Alternatively the part of the wall may comprise one or more clip elements, such as a hook. The clip elements initially clip the closure part to the container but then dissolve and release the releasable part. In this way only a small section of the wall dissolves and yet a large opening can be provided quickly.

There are many ways in which the part of the wall could be formed in order that it dissolves before the remainder of the container. For example, the at least part of the wall could be made from a thinner section of material and/or from a different material with a faster rate of dissolution than the remainder of the container.

In embodiments where the at least part of the wall is thinner than the remainder of the container the

material thinning may be arranged on the interior surface of the chamber wall. This is particularly relevant when the at least part of the wall defines a thin channel, because if the material thinning was arranged on the exterior surface the channel could become saturated with dissolved material, which would impede further dissolution.

In order to simplify production and allow for high volume production the container may be formed by injection moulding. In embodiments where the at least part of the wall is a thin section surrounding a panel, the area of the panel may form the gate region for injection moulding. This ensures that the thin section is correctly moulded by avoiding problems with moulded regions which are remote from the injection point.

As stated above, differential dissolution characteristics may be achieved by forming the container from two or more different materials at least some of which are water-soluble. It may, however, be preferable for simplification of the production process for the whole of the container to be formed from the same material.

In some embodiments at least part of the material from which the container is formed is a polyvinyl alcohol. Alternatively at least part of the material may be a polylactic acid or a starch based material.

The container may be flexible. This may be as a result of the choice of material and/or the thickness of the walls.

Where a container has several walls, the term "wall" can refer to any one or more of the walls. A spherical container, for example, has a single wall whereas a cube has six walls. The term is therefore generic and could
5 refer to any part of the material defining the chamber.

The present invention will now be more particularly described, by way of example, with reference to the accompanying drawings, in which:

Fig 1 is a perspective view of a housing formed as
10 part of a container according to a first embodiment;

Fig 2 is a section along line II - II of Fig 1,

Fig 3 shows the housing of Fig 2 with a lid component attached;

Fig 4 shows the container of Fig 3 following an
15 initial exposure to water;

Fig 5 is a section through a container according to an alternative embodiment;

Fig.6 is a section of a container according to an alternative embodiment; and

20 Fig.7 is a section of a container according to an alternative embodiment.

Referring first to Figs 1 and 2 there is shown a housing 10 of generally parallelepiped shape comprising a base wall 11, side walls 12, 13 and end walls 14, 15.
25 The housing is hollow and is open opposite the base 11 to form a tray-like structure. The housing 10 is formed from a water-soluble material. The material could be, for example, a grade of PVOH which dissolves at approximately 50°C. The interior of the housing 10 is
30 divided into two discrete chambers 30, 31 by spaced

parallel partition side walls 16, 17 which extend from end wall 15 and are joined at their ends by a partition end wall 18. Each of the partition walls 16, 17, 18 extends the full height of the housing walls 11, 12, 13, 14, 15. The portion of the base wall 14 which is bounded by the partition walls 16, 17, 18 includes a panel 19 surrounded by a region of material thinning 20 the purpose of which will be described in more detail below.

Referring now to Fig 3 the housing of Figs 1 and 2 is shown forming part of a container 1. The housing 10 is closed by a lid 25. The chambers 30, 31 are filled with different products before the lid 25 is applied. The lid 25 includes a panel 26 and region of material thinning 27 opposite and identical to those of the housing 10. The lid 25 may be secured to the housing 10 by any convenient means such as welding adhesion, interference fit or clipping. In this embodiment the seal is a face seal bond which is chemically activated, in this case by water, and supported internally by a wall 28 depending from the lid 25.

In this embodiment the thickness of the housing walls and the lid is approximately 0.4mm. This is about the thinnest that material can be without a risk of 'pin holes' i.e. tiny holes in the material which could compromise the integrity of the chamber. The material thinnings are approximately 0.15mm thick and are formed by reducing a small part of the uniform thickness of the container.

In use, the container 1 is placed in an aqueous environment and the temperature is raised beyond the

dissolution temperature of the container material. As the container 1 begins to dissolve the material thinned regions 20, 27 will completely dissolve before the remainder of the container. As a result, the panels 19, 26 are released from the lid 25 and the base wall 14 such that product can escape from the chamber 30. Of course the panels 19,26 do not have to be completely released to be effective. For example the material thinned regions 20, 27 could extend part way round the panels 19, 26 such that the panels 19, 26 become flaps which hinge open. Product from the chamber cannot escape until the remainder of the container has dissolved.

Referring now to Fig 5 there is shown an alternative embodiment. In this embodiment two discrete chambers 130,131 are formed from two separate, hollow cube-shape housings 110a, 110b which are bonded together along adjacent side walls 112a, 112b. Each housing 110a, 110b is open along one side but closed by a lid 125a, 125b, in this embodiment sealed to the housings by adhesion. The lids 125a, 125b are formed from different grades of PVOH which dissolve at different rates, with the material of the lid 125a having the faster dissolution rate. In this embodiment therefore the lid 125a of the housing 110a dissolves before the lid of housing 110b, to allow its product to escape first.

Referring to Fig.6 there is shown a container 201 with a single chamber 230. A generally cuboid housing 210 comprises a base wall 211 and side walls 214, 215. An open side of the housing 210 is closed by a lid 225.

The lid 225 is held onto the housing 210 by a clip 220 extending from its periphery. The clip 220 engages under a bead 235 formed around the open side of the housing 210.

5 The clip 220 is thinner than the remainder of the container 201. Accordingly, in use of the container the clip 220 dissolves before the remainder of the container so that the bead 235 no longer retains the lid 225, and therefore allows the lid 225 to be released from the
10 housing 210.

Referring to Fig.7 there is shown a container 301 with inner 310a and outer 310b generally cuboid housings defining inner 330 and outer 331 chambers. The outer chamber 331 contains a product which includes at least
15 some water. The inner chamber 330 contains a product which requires activation of some sort, through contact with the contents of the outer chamber 331. The outer chamber is formed so as to take longer to dissolve than the lid 325 of the inner chamber 330.

20 In use as the container begins to dissolve the lid 325 dissolves first, due to contact with the water in the outer chamber 331. This releases product from the inner chamber 330 into the outer chamber 331 before the outer housing 310b has dissolved. The product is therefore
25 activated just before the outer housing 310b has dissolved.

CLAIMS:

1. A water-soluble container (1) comprising one or more discrete chambers (30, 31) for containing product, at least part (20, 27) of the wall (11, 25) of the or at least one of the chamber/s is adapted to dissolve before the remainder of the chamber to allow product to escape.
2. A container (1) according to Claim 1, wherein the at least part (20, 27) of the wall (11, 25) is an exterior surface of the container, thereby releasing the product from the container when it dissolves.
3. A container (301) according to Claim 1, wherein the at least part of the wall (325) forms part of a chamber (330) which is carried within another chamber (331), whereby the contents of the chambers are mixed when the at least part of the wall (325) dissolves.
4. A container (1) according to any of Claims 1 to 3, wherein the at least part (20, 27) of the wall (11, 25) defines a releasable part (19, 26), such that when the at least part of the wall dissolves the releasable part is released undissolved.
5. A container (1) according to any of Claims 1 to 3, wherein the releasable part is a panel (19, 26) and the at least part of the wall at least partly surrounds the

panel, such that the panel is released when the part of the wall has dissolved.

6. A container (201) according to any preceding claim, wherein the at least part of the wall (225) comprises one or more clip elements (220) adapted to retain the releasable part (225) until dissolved.

7. A container (1) according to any preceding claim, wherein the at least part (20, 27) of the wall is thinner than the remainder of the container.

8. A container (1) according to Claim 7, wherein the material thinning (20, 27) is arranged on the interior surface of the chamber wall.

9. A container (1) according to any preceding claim, wherein the container is formed by injection moulding.

10. A container (1) according to any preceding claim, wherein at least part of the material from which the container is formed is a polyvinyl alcohol.

11. A container (1) according to any preceding claim, wherein at least part of the material from which the container is formed is a polylactic acid.

12. A container (1) according to any proceeding claim, wherein at least part of the material from which the container is formed is starch-based.

13. A container (1) according to any preceding claim, wherein the whole of the container is formed from the same material.

14. A container (1) according to any preceding claim, wherein the container is flexible.

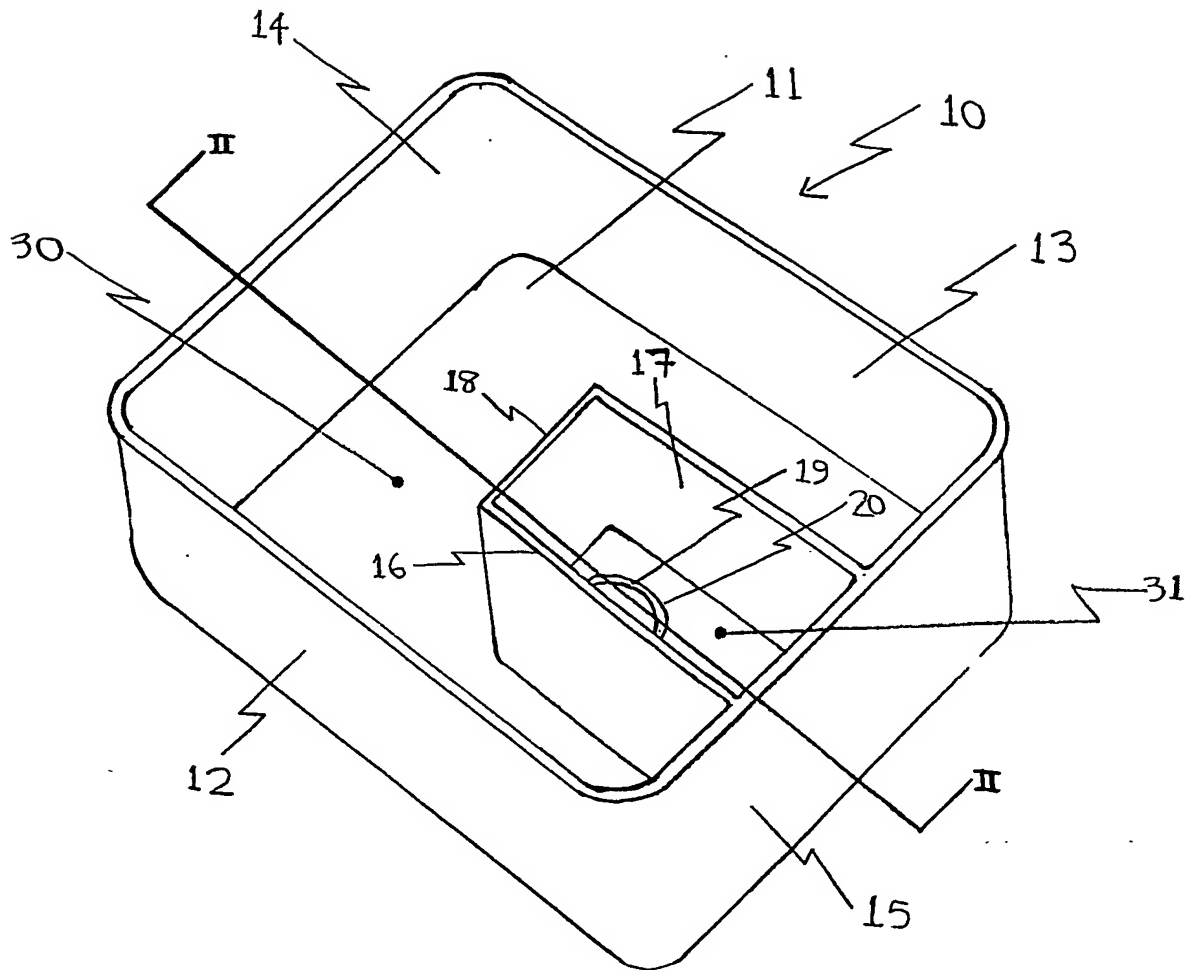


FIG 1

2/4

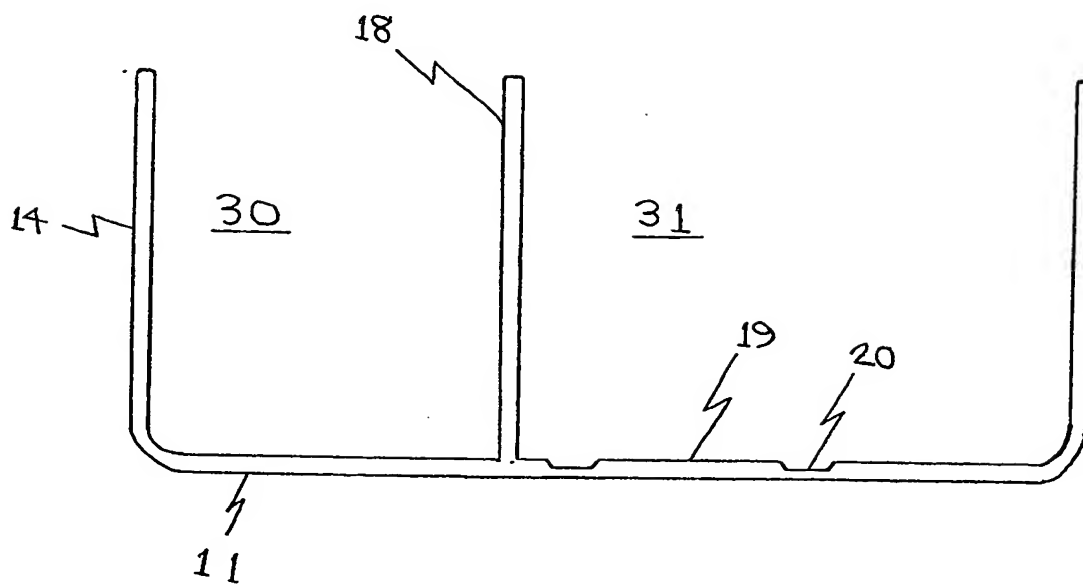


FIG 2

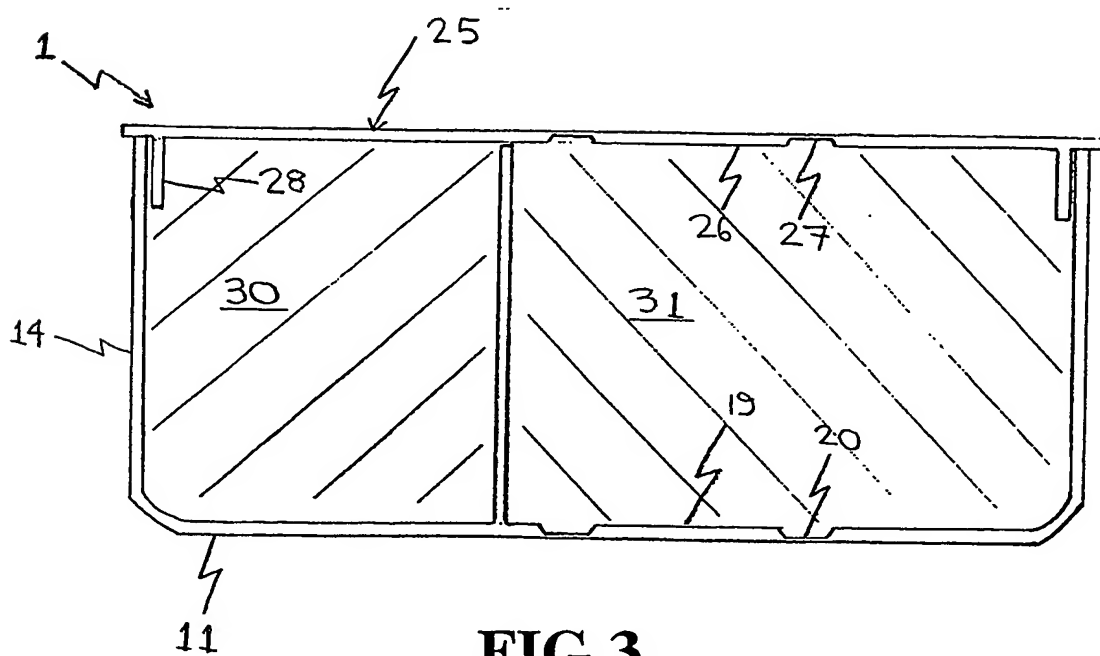


FIG 3

3/4

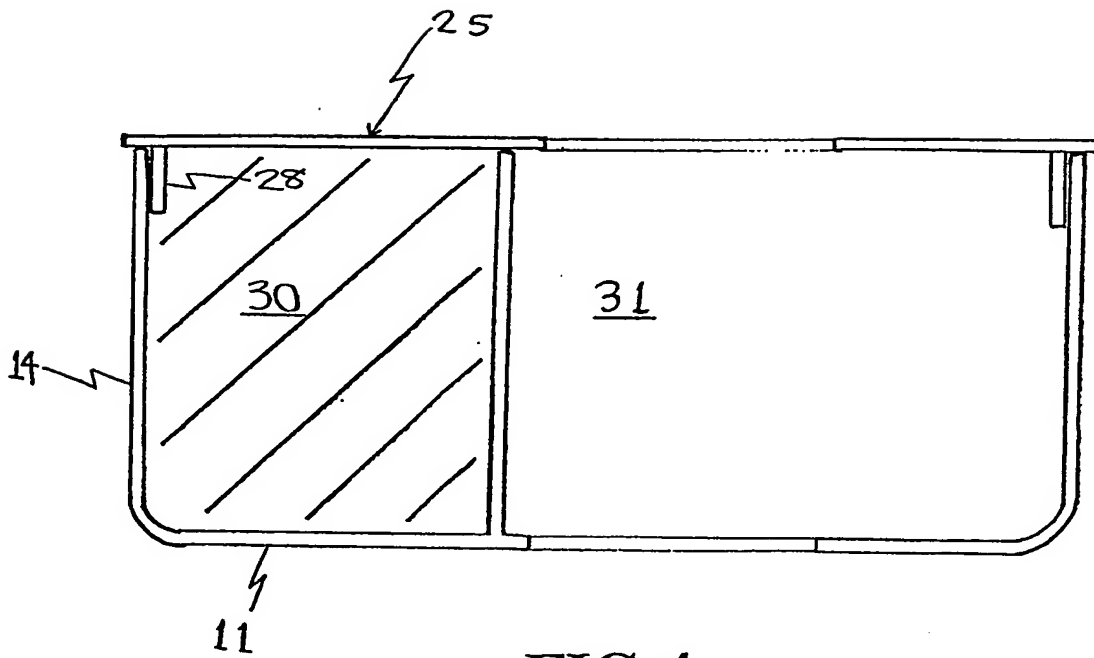


FIG 4

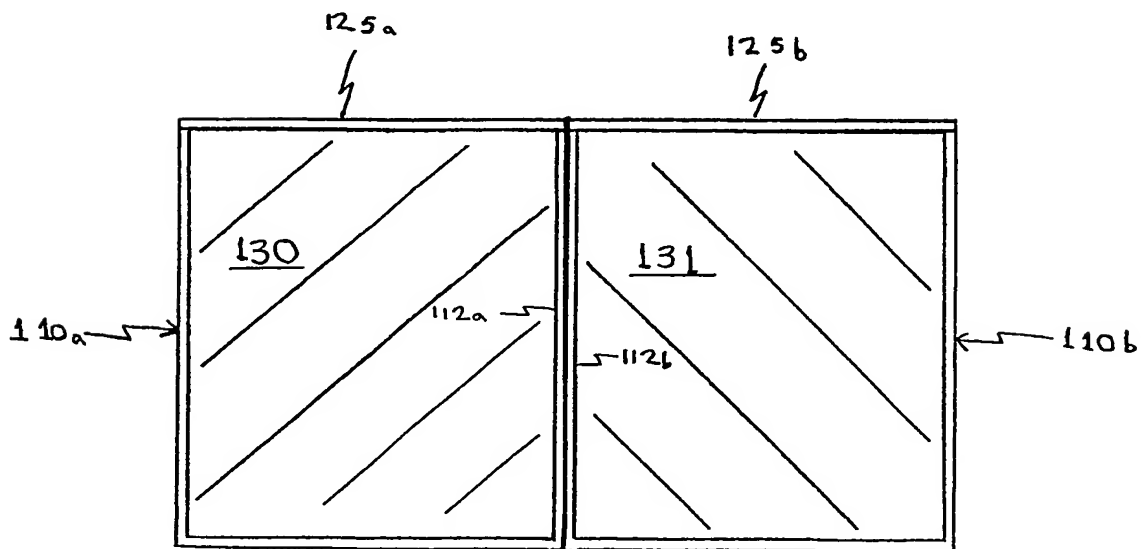


FIG 5

4/4

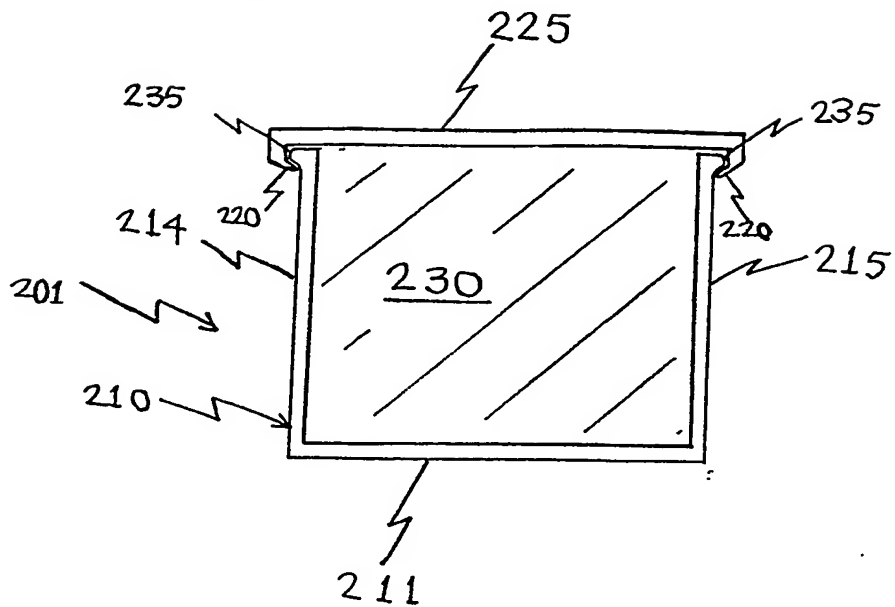


FIG 6

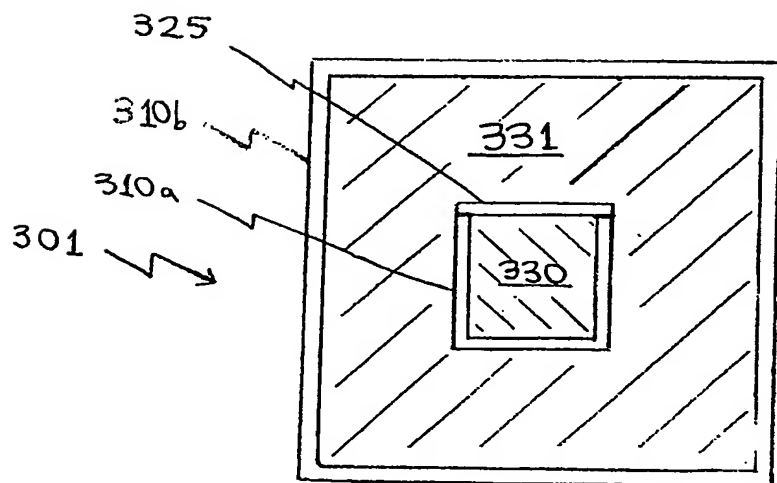


FIG 7

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP03/07798

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 B65D65/46

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 B65D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 01 83668 A (PROCTER & GAMBLE) 8 November 2001 (2001-11-08) page 9, line 15 - line 24 page 10, line 10 - line 14 page 15, line 15 - line 20	1,2,7, 10-14
A	----	8
X	EP 0 593 952 A (DISPO KOMMERZ AG) 27 April 1994 (1994-04-27) page 3, line 24 - line 27 page 5, line 1 - line 17	1,2,7, 10,12-14
A	----	3
X	GB 2 356 842 A (AQUASOL LTD) 6 June 2001 (2001-06-06) page 2, last paragraph -page 3, paragraph 1 page 3, paragraph 3 page 8, last paragraph -page 9, paragraph 1	1,2,7,9, 10,13
A	----	4,5
	----- -/-	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

S document member of the same patent family

Date of the actual completion of the international search

7 October 2003

Date of mailing of the international search report

14/10/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Bridault, A

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 03/07798

C.(Continuation) DOCUMENTS CONSIDERED RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 01 36290 A (RECKITT BENCKISER ET AL.) 25 May 2001 (2001-05-25) claims 1,3,9,22,23,36 ---	1,2,9, 10,13,14
A	DE 809 896 C (ALBERT GOURGUES LYON RHONE FRA) 2 August 1951 (1951-08-02) page 2, line 53 - line 55; figure 4 -----	6

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 03/07798

Patent document cited in search report		Publication date		Patent family member(s)		Publication date
WO 0183668	A	08-11-2001	GB	2361685 A		31-10-2001
			AU	4561401 A		12-11-2001
			AU	4735901 A		12-11-2001
			BR	0110257 A		07-01-2003
			BR	0110322 A		07-01-2003
			CA	2404675 A1		08-11-2001
			CA	2404681 A1		08-11-2001
			CN	1426456 T		25-06-2003
			CN	1426458 T		25-06-2003
			EP	1276845 A1		22-01-2003
			EP	1276846 A2		22-01-2003
			GB	2361690 A		31-10-2001
			WO	0183658 A2		08-11-2001
			WO	0183668 A1		08-11-2001
			US	2003050210 A1		13-03-2003
			US	2003092590 A1		15-05-2003
<hr/>						
EP 0593952	A	27-04-1994	DE	9214065 U1		03-06-1993
			EP	0593952 A1		27-04-1994
<hr/>						
GB 2356842	A	06-06-2001	GB	2357488 A		27-06-2001
			AU	1647001 A		30-05-2001
			BR	0015617 A		10-09-2002
			CA	2391613 A1		25-05-2001
			CA	2414395 A1		25-05-2001
			CN	1409682 T		09-04-2003
			DE	20022487 U1		13-12-2001
			EP	1232100 A1		21-08-2002
			WO	0136290 A1		25-05-2001
			GB	2358382 A ,B		25-07-2001
			GB	2370552 A ,B		03-07-2002
			GB	2370553 A		03-07-2002
			GB	2370554 A ,B		03-07-2002
			GB	2376676 A ,B		24-12-2002
			US	2003108705 A1		12-06-2003
			<hr/>			
WO 0136290	A	25-05-2001	GB	2357488 A		27-06-2001
			GB	2361010 A		10-10-2001
			AU	1647001 A		30-05-2001
			BR	0015617 A		10-09-2002
			CA	2391613 A1		25-05-2001
			CA	2414395 A1		25-05-2001
			CN	1409682 T		09-04-2003
			DE	20022487 U1		13-12-2001
			EP	1232100 A1		21-08-2002
			GB	2356842 A		06-06-2001
			WO	0136290 A1		25-05-2001
			GB	2358382 A ,B		25-07-2001
			GB	2370552 A ,B		03-07-2002
			GB	2370553 A		03-07-2002
			GB	2370554 A ,B		03-07-2002
			GB	2376676 A ,B		24-12-2002
			US	2003108705 A1		12-06-2003
<hr/>						
DE 809896	C	02-08-1951	NONE			